

Product Specification



CCFA-759

Multiband Combiner

Combines Common Wireless Bands

- 700 / 850 / 1900 / AWS / WCS

Electrical Specifications

FREQUENCY RANGE	
COMMON PORT	698 – 2360 MHz
700 BAND PORT	698 – 793 MHz
850 BAND PORT	824 – 894 MHz
1900 BAND PORT	1850 – 2000 MHz
AWS BAND PORT	1695 – 1780 MHz & 2110 – 2180 MHz
WCS BAND PORT	2305 – 2360 MHz
PASSBAND INSERTION LOSS	0.8 dB Max.
PASSBAND RETURN LOSS	20 dB Min.
PORT TO PORT ISOLATION	40 dB Min.
PASSIVE INTERMODS	-153 dBc
POWER HANDLING	50 W CW / Avg, 500 W Peak

Environmental Specifications


OPERATING TEMPERATURE	-40° to +65° Operating
ENVIRONMENTAL	Per ETS-300
WEATHERIZATION	Per IP-65 (IP-67 Optional)
LIGHTENING PROTECTION	Per EN / IEC 61000 4-5, Level 4

Rev: 072319

Product Specification

Mechanical Specifications

CONNECTORS	4.3/10.0 Female (Long Neck) Optional: 7/16 DIN, Type 'N'
SIZE	7.8 X 9.1 X 2.9" Excluding Connectors
WEIGHT	Approx. 8 lbs.

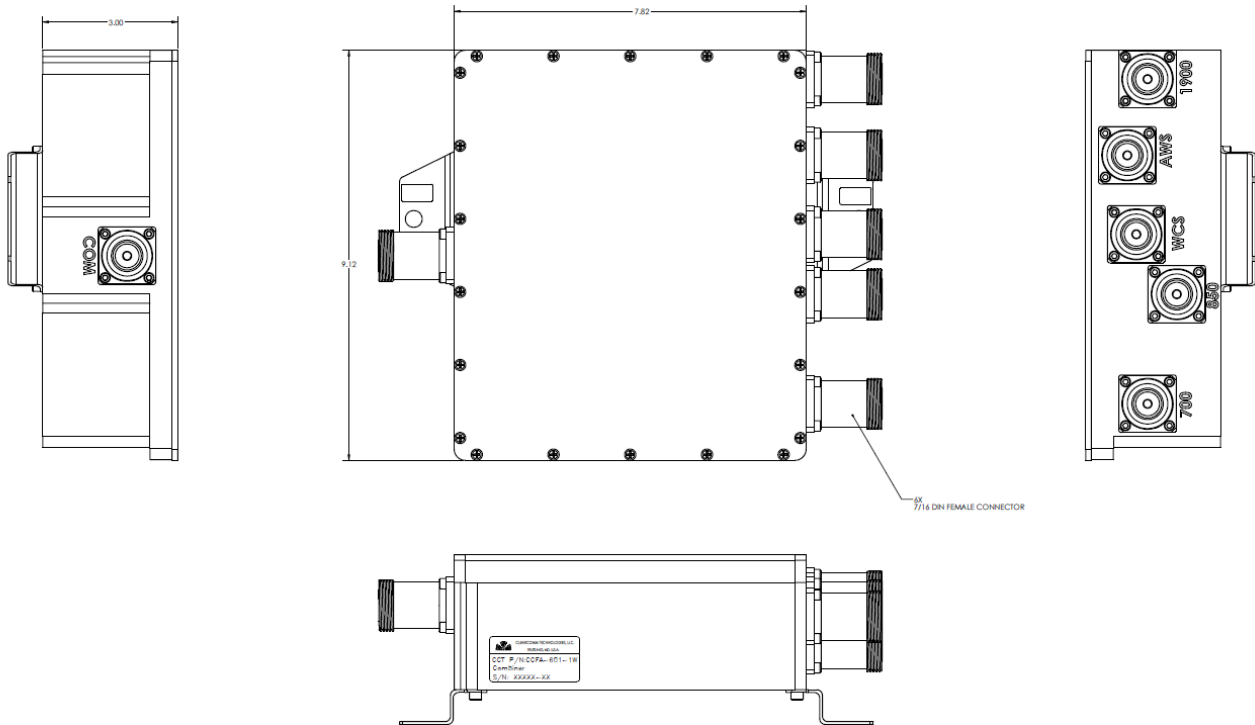

OUTLINE DRAWING

Rev: 072319