

# Product Specification



## CCTF-206

### AWS A/B Band Transmit Filter

- **Passes 2110-2130 MHz**
- **Use for Spectrum Clearing**
- **Close-In Interference Rejection**

---

## Electrical Specifications

PASSBAND	2110 - 2130 MHz
PASSBAND INSERTION LOSS	2.0 dB Max.
PASSBAND LOSS VARIATION	1.2 dB Max.
PASSBAND RETURN LOSS	20 dB Min.
REJECTION	
2108 and Below	30 dB Min.
2132 to 2700 MHz	30 dB Min.
POWER HANDLING	50 W Avg. / 500 W Peak.
PASSIVE INTERMODS	-153 dBc

---

## Environmental Specifications

WEATHERIZATION	Per IP-65 (Indoor Use)
OPERATING TEMPERATURE	-25° to +70°C Operating

Rev: 072419


# Product Specification

## Mechanical Specifications

CONNECTORS 7/16 DIN, Type 'N Female, Optional, SMA

SIZE 3.90" x 2.45" x 2.00" Excluding Connectors

WEIGHT Approx.: 2.0 lbs

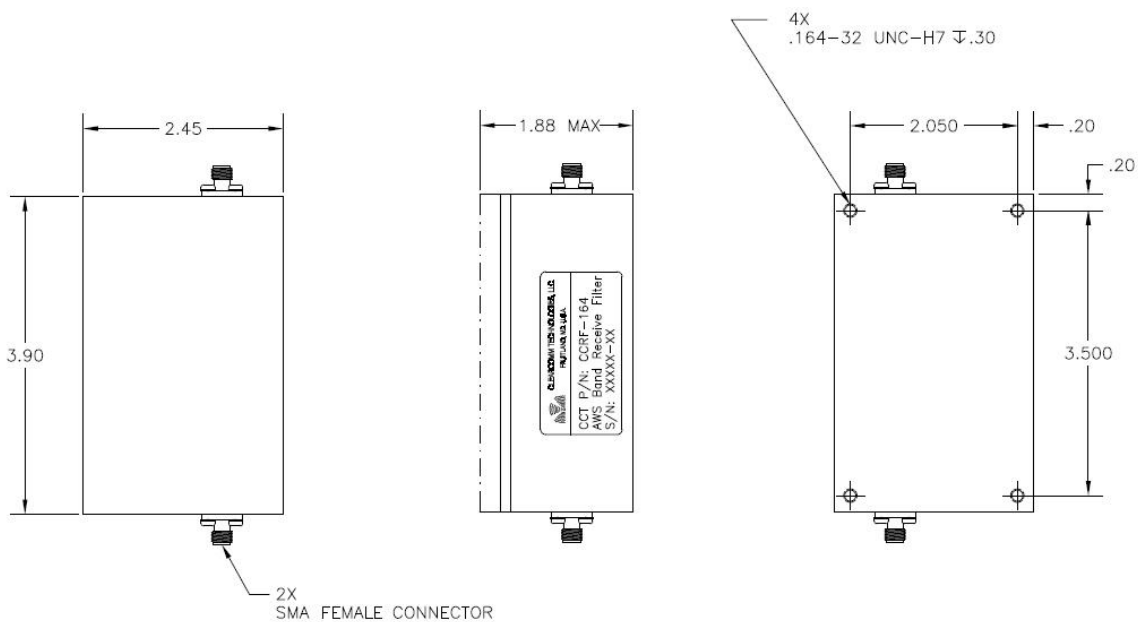

### OUTLINE DRAWING

Rev: 072419