

Product Specifications



BULKHEAD PANELS

- **Covers DC to 6000 MHz**
- **Low Insertion Loss**
- **Low PIM Connectors, -160 dBc**
- **IBWave Supported**

Electrical Specifications

FREQUENCY RANGE	DC-6000 MHz
INSERTION LOSS	0.05 dB Max.
RETURN LOSS	26 dB Min.
POWER RATING	500W Avg. 5kW Peak Any Port
PASSIVE INTERMODS	-160 dBc
DC VOLTAGE RATING	3.5 kV (6 kV Test Voltage)

Bulkhead Panel Options
<p>ClearComm's CCRA series bulkhead Panels are available in a multitude of sizes and connector options. Contact factory with your specific requirements. Available options include:</p> <ul style="list-style-type: none"> Number of Connectors Connector Type Size of Panel Panel Mounting Panel Marking

CCBH-101-xx	Bulkhead Panel, 19" x 1RU, 12 Connectors	1 Row of 12 Connectors
CCBH-102-xx	Bulkhead Panel, 19" x 2RU, 24 Connectors	2 Rows of 12 Connectors
CCBH-103-xx	Bulkhead Panel, 19" x 3RU, 36 Connectors	3 Rows of 12 Connectors
CCBH-104-xx	Bulkhead Panel, 19" x 4RU, 48 Connectors	4 Rows of 12 Connectors
CCBH-105-xx	Bulkhead Panel, 19" x 5RU, 60 Connectors	5 Rows of 12 Connectors
CCBH-106-xx	Bulkhead Panel, 19" x 6RU, 72 Connectors	6 Rows of 12 Connectors
CCBH-107-xx	Bulkhead Panel, 19" x 7RU, 84 Connectors	7 Rows of 12 Connectors
CCBH-108-xx	Bulkhead Panel, 19" x 8RU, 96 Connectors	8 Rows of 12 Connectors
CCBH-109-xx	Bulkhead Panel, 19" x 9RU, 108 Connectors	9 Rows of 12 Connectors

Rev: 102021

Product Specifications



Environmental Specifications

TEMPERATURE RANGE -20 to +65°C Operating
 WEATHERIZATION IP-65

Mechanical Specifications

CONNECTORS (Add to End of Model Number)
 -XDF 4.3/10.0 Female
 -N10F NEX10
 -QF QMA Female
 -NF Type 'N' Female
 -DF 7/16 DIN

Contact Factory for additional options

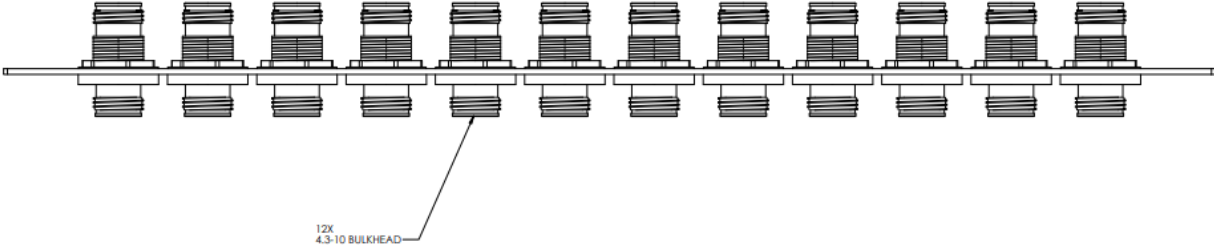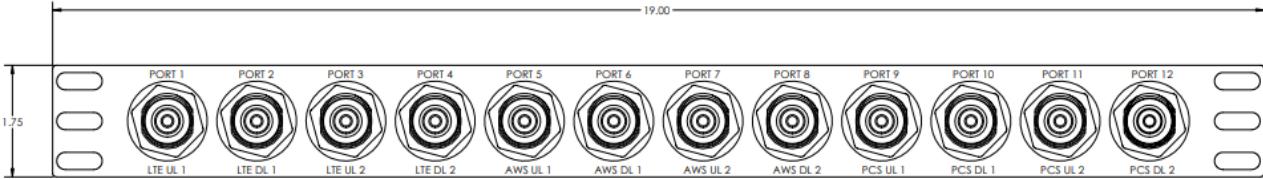


Example 1 – 19” x 1U Panel with 12 4.3/10.0 Female Connectors

Model CCBH-101-XDF

Rev: 102021

Product Specifications

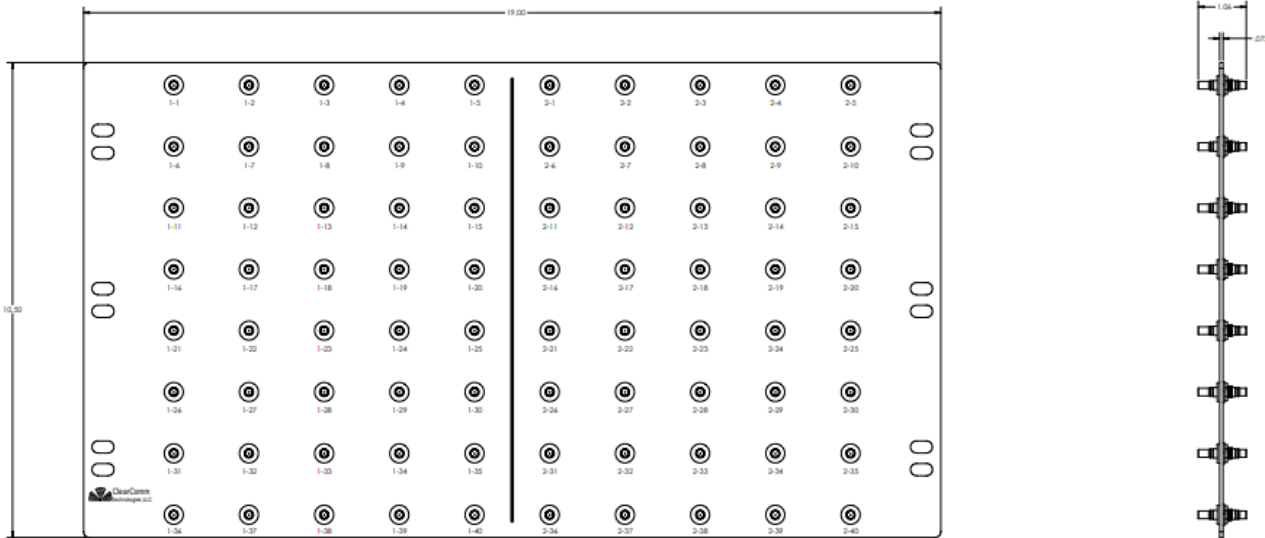

Example 2 – 19” x 8U Panel with 64 QMA Female Connectors

Model CCBH-108-QF

Rev: 102021