


Product Specification

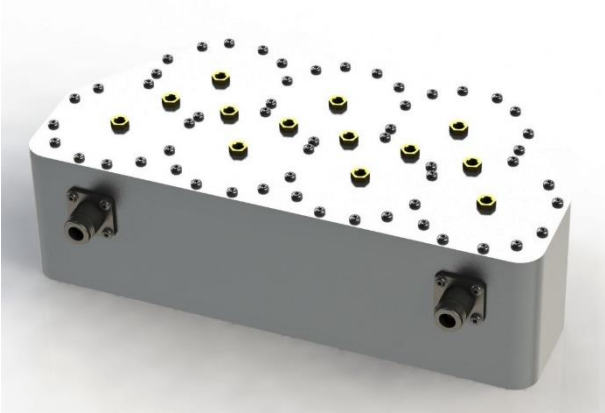

CCRF-199

700 Lower B/C Transmit Filter

- **Passes Band 17 Downlink**
- **Use for Spectrum Clearing**
- **Sharp Out of Band Rejection**

Electrical Specifications

PASSBAND	734 – 746 MHz
PASSBAND INSERTION LOSS	1.0 dB Max.
PASSBAND RETURN LOSS	20 dB Min.
REJECTION	
DC - 698 MHz	50 dB Min.
776 – 894 MHz	50 dB Min.
POWER HANDLING	10W MAX.

Environmental Specifications


WEATHERIZATION	Per IP-65 (Optional IP-66)
OPERATING TEMPERATURE	-20° to +60°C Operating

Mechanical Specifications

CONNECTORS	Type 'N' Female Optional 4.3/10.0, 7/16 DIN
SIZE	10.7" x 5.2" x 3.4" Excluding Connectors
WEIGHT	Approx.: 10.5 lbs. Rev: 020222



Product Specification

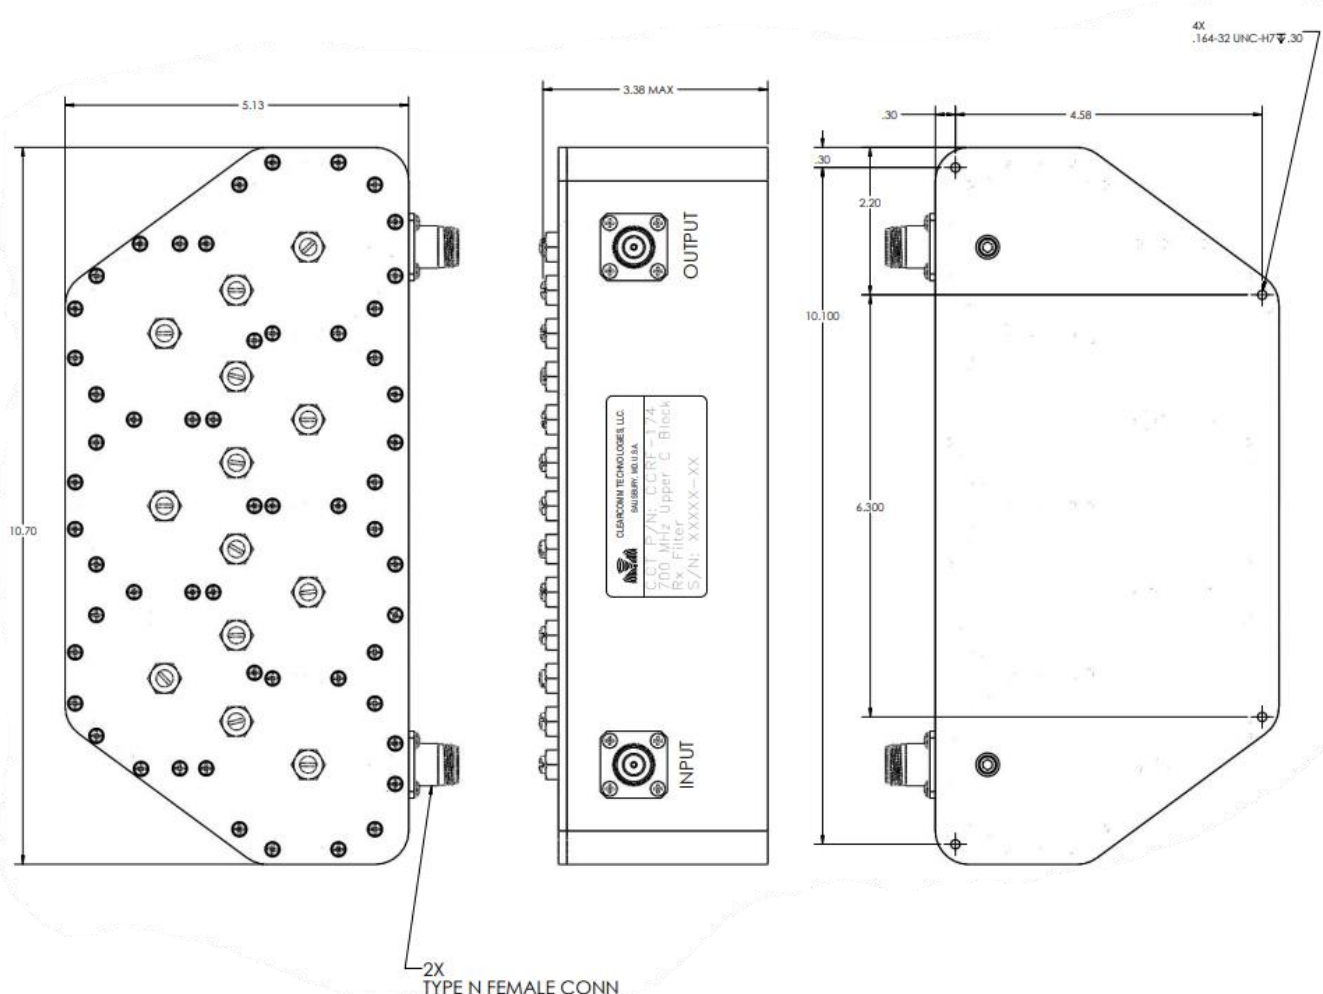

OUTLINE DIMENSIONS

Rev: 020222

ClearComm Technologies
Clearly the Choice!

600 Beam Street
Tel: 410-860-0500
Web: www.clearcommtech.com

Salisbury, MD 21801
Fax: 410-860-9005
E-Mail: sales@clearcommtech.com